

Suppression of an unwanted flow of charged particles in a tandem accelerator with vacuum insulation

This content has been downloaded from IOPscience. Please scroll down to see the full text.

2016 JINST 11 P04018

(<http://iopscience.iop.org/1748-0221/11/04/P04018>)

View [the table of contents for this issue](#), or go to the [journal homepage](#) for more

Download details:

IP Address: 84.237.42.38

This content was downloaded on 14/04/2016 at 03:49

Please note that [terms and conditions apply](#).

RECEIVED: January 11, 2016

REVISED: March 6, 2016

ACCEPTED: April 3, 2016

PUBLISHED: April 13, 2016

Suppression of an unwanted flow of charged particles in a tandem accelerator with vacuum insulation

**A. Ivanov,^{a,b} D. Kasatov,^a A.Koshkarev,^b A. Makarov,^a Yu. Ostreinov,^a I. Shchudlo,^a
I. Sorokin^a and S. Taskaev^{a,b,1}**

^a*Budker Institute of Nuclear Physics SB RAS,
11 Lavrentiev avenue, 630090 Novosibirsk, Russia*

^b*Novosibirsk State University,
2 Pirogov str., 630090 Novosibirsk, Russia*

E-mail: taskaev@inp.nsk.su

ABSTRACT: In the construction of a tandem accelerator with vacuum insulation several changes were made. This allowed us to suppress the unwanted flow of charged particles in the accelerator, to improve its high-voltage stability, and to increase the proton beam current from 1.6 mA to 5 mA.

KEYWORDS: Accelerator Applications; Instrumentation for neutron sources; Neutron sources

¹Corresponding author.

Contents

1	Introduction	1
2	Experimental results	1
3	Conclusion	6

1 Introduction

Boron neutron capture therapy (BNCT) is currently considered as a promising technique for treatment of malignant tumors [1]. It provides a selective destruction of tumour cells by prior accumulation of a stable boron-10 isotope inside them and subsequent irradiation with epithermal neutrons. As a result of the neutron absorption by boron a nuclear reaction takes place with a large energy release in the cell, leading to its death. Clinical trials on nuclear reactors have shown that BNCT can treat glioblastoma, brain metastases of melanoma, and several other tumors. For the widespread introduction of this technique in practice compact epithermal neutron sources based on charged particle accelerators are required.

A new type of the accelerator — a tandem accelerator with vacuum insulation — was proposed and constructed in the Budker Institute of Nuclear Physics [2]. The accelerator is characterized by fast ion acceleration (25 kV/cm) and a large distance between the ion beam and the insulator (on which electrodes are mounted). After the dark current was decreased to an acceptable level [3], the injection of a negative hydrogen ion beam into the accelerator [4] and stripping in the gas stripping target was optimized [5], the proton beam current was increased from the initial values of about 140 μA [6] to 1.6 mA [7], which was stable for more than one hour. In the elucidation of the reasons for the limitation of the current in the tube for accelerating negative hydrogen ions, a significant electron flow and a counter-flow of positive ions generated in the acceleration tube and in the stripping target were found and measured [8].

With a view to suppress these unwanted flows of charged particles, we proposed and implemented the ideas new for charged particle accelerators. This paper describes our modernization of the accelerator and reports the experimental results of the investigation and suppression of unwanted flows of charged particles.

2 Experimental results

Figure 1 shows the accelerator. Coming from source 1 the low-energy negative hydrogen ion beam is deflected in a magnetic dipole field by an angle of 15 degrees, focused by a pair of magnetic lenses 2, injected into accelerator 3 and accelerated up to 1 MeV. In a gas (argon) stripper 7, which is installed inside a high-voltage electrode 6, negative hydrogen ions are converted into protons. Then protons are accelerated by the same 1 MV potential to an energy of 2 MeV. The potential

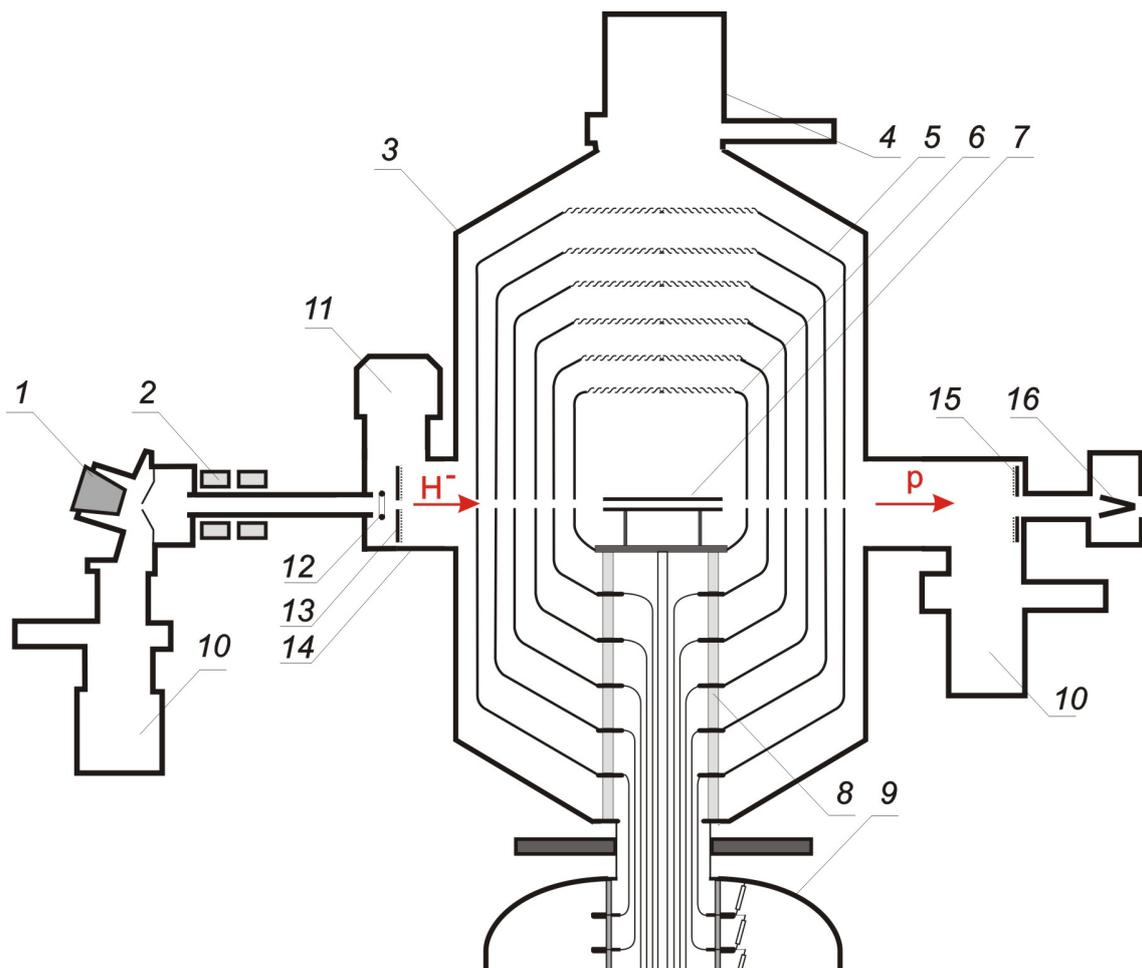


Figure 1. Modernized tandem accelerator with vacuum insulation: (1) negative hydrogen ion source; (2) magnetic lenses; (3) accelerator; (4) cryogenic pump; (5) intermediate electrodes; (6) high-voltage electrode; (7) gas stripper; (8) insulator; (9) high-voltage power supply; (10) turbomolecular pumps; (11) cryogenic pump; (12) ring; (13) cooled metallic diaphragm and end detector with a grid; (14) intake vacuum volume; (15) detector with a grid; (16) Faraday cup. The directions of negative hydrogen ion (H^-) and proton (p) beams are shown by the arrows.

for the high-voltage electrode 6 and five intermediate electrodes 5 of the accelerator is supplied by the high-voltage power supply 9 (most the source is not shown) through insulator 8, wherein the resistive divider is set. Gas evacuation is performed by turbomolecular pumps 10 mounted on the ion source and at the accelerator exit and a cryogenic pump 4 via jalousies in the electrodes.

To measure the current at the accelerator exit, a cooled Faraday cup biased at a positive potential to suppress secondary electrons is used. The difference between the measured load current of the high voltage power supply and the measured proton beam current multiplied by 2 gives the current of associated charged particles. By the associated charged particles we mean negative hydrogen ions that have lost only one electron in the stripper, dark currents, and the electrons and positive ions generated in the acceleration tube and in the stripper. In the present experiment we measured the dependence of the proton beam current and the associated particle current on the accelerator voltage

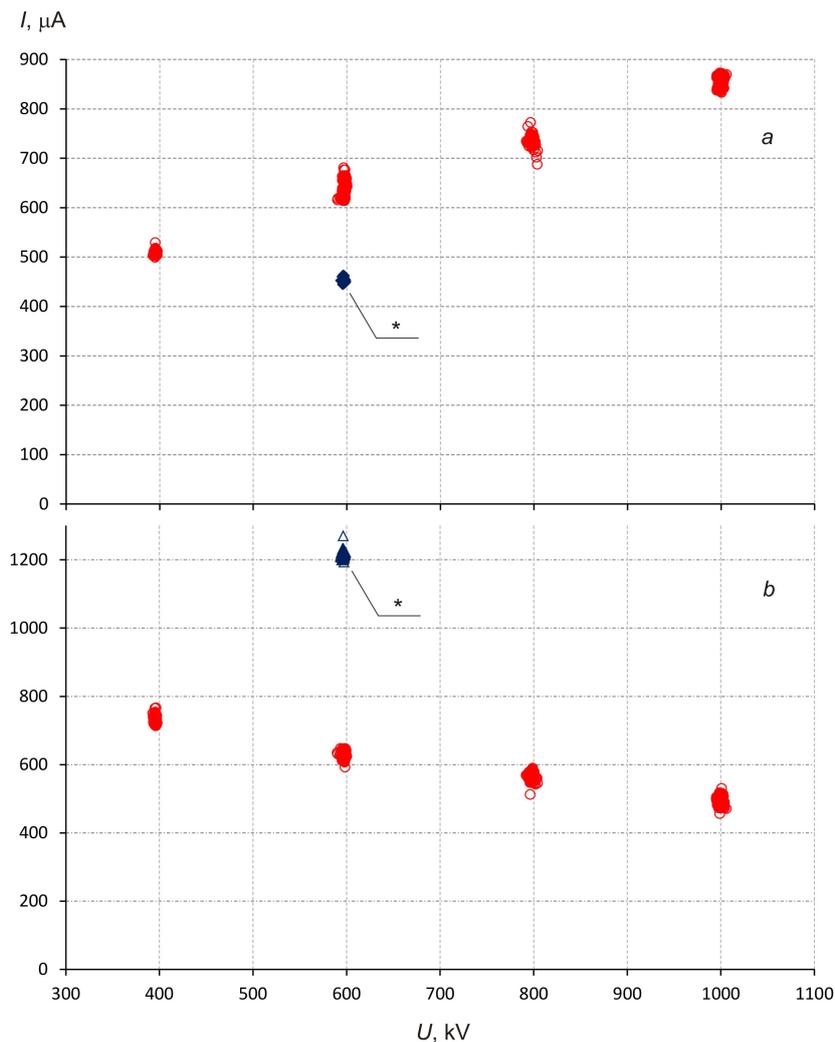


Figure 2. Dependence of the proton beam current (a) and the associated particle current (b) on the accelerator voltage. The results obtained with a switched off cryogenic pump are denoted by *.

at a constant injection current. It is shown in figure 2. It can be seen that when the accelerator voltage decreases, the proton current decreases, while the associated particle current increases. This can be due to bad vacuum conditions. This is confirmed by the result obtained when the cryogenic pump was switched off: the proton current decreased even more whereas the associated particle current increased. The major contributors to the associated particle current are the electrons and ions generated because the characteristic dark current in the accelerator is about $10 \mu\text{A}$ and the current of negative hydrogen ions, which have lost only one electron in the stripper, is less than $100 \mu\text{A}$. The accelerator entrance appears to be a critical point: here the injected ions still have a relatively low energy. As a consequence, there is a high probability of their interaction with atoms and molecules of the residual gas. The residual gas pressure at this point can be high because the gas flow from the stripper and the negative hydrogen ion source comes here.

To prevent undesirable ion beam stripping we improved the vacuum conditions at the accelerator entrance by modernization of the accelerator. In the modernized accelerator, an intake vacuum

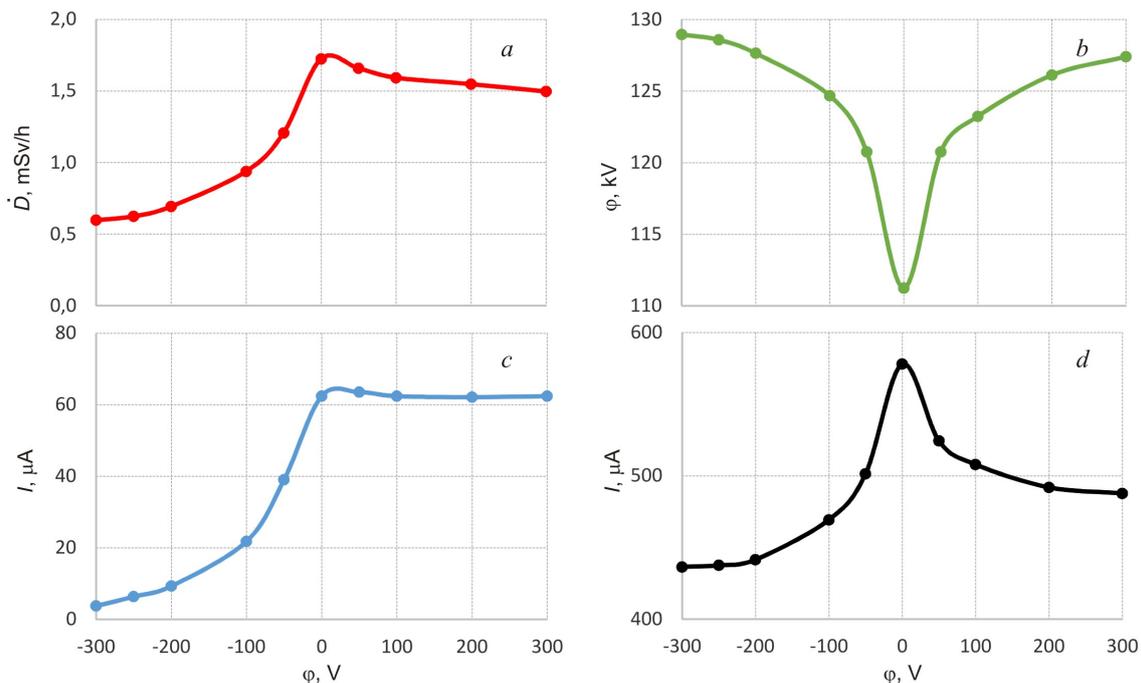


Figure 3. Dependence of the dose rate for bremsstrahlung D (a), the first electrode potential of the accelerator φ (b), the current supplied to the end detector I (c), and the associated particle current I (d) on the potential φ simultaneously supplied to the ring and the grid mounted at the accelerator entrance.

volume (14 in figure 1) was replaced by a new larger one. On the upper flange plate of the volume, through a DU 250 gate valve, an additional cryogenic pump 11 was installed with the evacuation rate of 2500 l/s for argon and 5000 l/s for hydrogen (11 in figure 1). With the intent to improve the vacuum conditions within the entrance unit, diaphragm 13 was also mounted, which serves as vacuum resistance and limits the penetration of gas and ultraviolet radiation into the acceleration tube. The installation of the diaphragm provides the opportunity to move it for centering relative to the ion beam axis. The diaphragm is cooled to prevent the secondary electron emission due to its heating by the peripheral part of the injected ion beam. Between the exit of the beam transport path and the diaphragm, metal ring 12 is placed; a negative potential applied to this ring should suppress the flow of electrons accompanying the negative hydrogen ion beam. The entire surface of the diaphragm from the accelerator side is covered by a tantalum wire grid to suppress secondary electrons, generated by positive ion irradiation, by supplying a negative potential to it. Between the diaphragm and the grid, an insulated metal disk is mounted to measure the positive ion current. A similar disk with grid 15 is mounted within the exit unit of the accelerator.

The modernization resulted in drastic changes. Figure 3 depicts the graphs of some measured parameters depending on the potential simultaneously supplied to the grid in the entrance unit of the accelerator and to the ring. The measurements were carried out at an injected current of 800 μA , an accelerator voltage of 900 kV, and the gas supply to the stripping target providing 90% beam stripping.

As can be seen in figure 3a, the supply of the potential to the grid at the accelerator entrance significantly decreases the dose rate for bremsstrahlung, which is explained by a decrease in the current of electrons accelerated to the full voltage [9].

The current-voltage characteristic of the end detector (disk with a grid) at the accelerator entrance shown in figure 3c indicates that the secondary electron emission coefficient under the effect of positive ions formed is about 10. Such a high secondary electron emission coefficient is typical of many-electron ions and atoms with an energy above 100 keV [10].

The potential supply leads to an increase in the first electrode potential (figure 3b) given by a voltage divider and its approach to the equilibrium value of 150 kV obtained in the absence of currents in the gaps. The approach of the potential to the equilibrium value indicates a decrease in the current in the gap between the vacuum tank walls and the first electrode.

Figure 3d clearly shows that the potential supply results in a noticeable decrease in the associated particle current.

In total, the inclusion of an additional cryogenic pump, the installation of a diaphragm, and the supply of a -300 V potential to the ring and both grids (at the accelerator entrance and exit) cause an increase in the first electrode potential to the equilibrium value, a 3.3 times decrease in the dose rate for bremsstrahlung, and a 10% increase in the proton beam current. The main factor affecting the first electrode potential is the ring and that affecting the dose rate for bremsstrahlung is the exit grid.

Let us determine an upper estimate of the absolute current of electrons accelerated to the full voltage. Let us assume that the current is carried only by electrons. When both cryogenic pumps are switched off and the grid is grounded, the measured current in the gap exceeds the injected beam current (1.7 mA) by 0.9 mA. This ratio was characteristic of the accelerator and was previously noted in [11, p. 965]. Also, in this case, we observe a noticeable decrease in the first electrode potential, being 0.22 of the equilibrium value. Let us assume that the electrons flow only within the first gap (between the vacuum tank and the first intermediate electrode) and in the acceleration tube up to the high-voltage electrode. Therefore, we assume that the currents are absent between the intermediate electrodes. In this case, the current in the first gap can be easily calculated; it is $465 \mu\text{A}$. Correspondingly, the remaining current of $435 \mu\text{A}$ flows within the acceleration tube. When both cryogenic pumps are switched on and the potential is supplied to the ring and the grids, the total electron current 9 times decreases and the dose rate for bremsstrahlung 20 times decreases. Hence, the total electron current decreased to $100 \mu\text{A}$ and the current of electrons accelerated to the full voltage decreased to $22 \mu\text{A}$. The latter value is about 1% of the injected beam current. Since the current in the gaps is carried not only by electrons and there is a current between the intermediated electrodes, the electron current is smaller. The analysis of a series of experiments performed gives the current of electrons accelerated to the full voltage of 0.5% of the injected beam current. It can be said that our actions actually allowed us to remove the associated electron flow from the injected beam.

It is worth noting yet another two points. Firstly, the supply of the -300 V potential to the grid at the accelerator exit decreases the dose rate only by 5%. Secondly, before the modernization the gas supply in the stripping target resulted in a nearly 4 times increase in the dose rate of deceleration radiation (figure 11 in [11]), whereas now it is only 1.5 times increased. These facts indicate that the effect of the stripping gas on the occurring processes ceased to be dominating. The residual gas ionization by the injected ion beam, which leads to the formation of ion-electron pairs in the acceleration tube, plays an important role.

The main result of the modernization is not so much a decrease in the unwanted charged particle flows, as a better high-voltage stability of vacuum acceleration gaps and almost complete disappearance of full-voltage breakdowns. This allowed us to raise the current of the injected

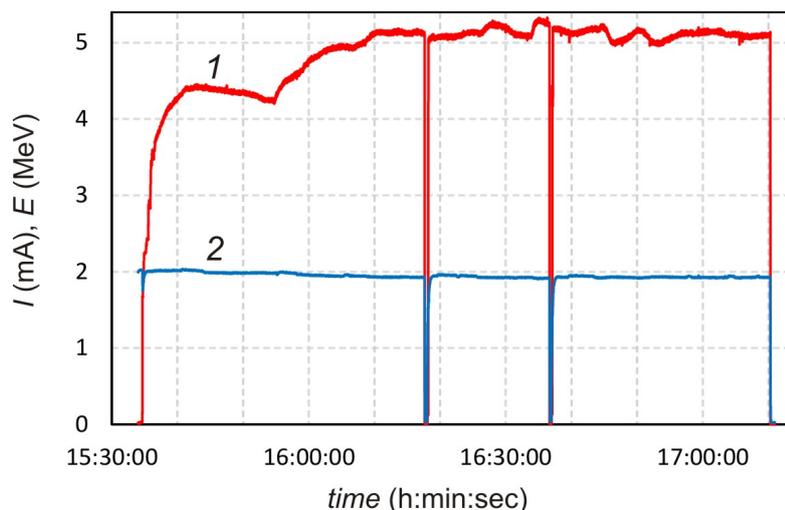


Figure 4. Oscilloscope measurement of the proton beam current I (1) and the energy E (2).

negative hydrogen ion beam to the maximum and significantly increase the proton beam current, from 1.6 mA to 5 mA. Figure 4 depicts the oscilloscope measurements of the current and the proton beam energy obtained in one of the runs. The measured proton beam current during one hour exceeds 5 mA, with an average value of 5.120 ± 0.060 mA and the maximum of 5.327 mA. Note that the current fluctuations are due to the unstable operation of the negative hydrogen ion source at boundary parameters. With proton beam currents of 3 mA and 4 mA, the operation during one hour with the current stability of 0.5% and without high-voltage breakdowns was provided. As can be seen from figure 4, at the current of more than 5 mA two breakdowns occurred, after which the current recovered to the previous levels in 35 seconds, which is quite acceptable. At an intense beam current, the voltage of the high-voltage power supply dropped down and the proton energy decreased from 2 MeV at the 4 mA current to 1.927 ± 0.012 MeV at 5 mA. This effect can be eliminated by the modification of the power supply, for example, by appending of an additional section of a rectifier.

When the proton beam with the 5 mA current generated in a tandem accelerator with vacuum insulation is dumped onto a lithium target, it allows us to obtain the epithermal neutron flow density required for BNCT, which opens the way to use this type of an accelerator based neutron source for BNCT in oncology hospitals [1, 11]. This proton accelerator can be also used to develop systems for the prompt detection of explosives and drugs [12], to calibrate the detectors of weakly interacting dark matter particles [13], and other applications. In order to increase the proton beam current, it is intended to install a modernized negative ion source with high current and to take measures to suppress the secondary ion flows on the intermediate electrodes of the acceleration tube.

3 Conclusion

The modernization significantly suppressed the unwanted charged particle flows in the tandem accelerator with vacuum insulation. This resulted in the improved high voltage stability of acceleration gaps and enabled an increase in the proton beam current from 1.6 mA to 5 mA. An accelerator with this current can be used in BNCT and other applications.

Acknowledgments

The study was supported by grants from the Russian Science Foundation (Project no. 14-32-00006) and the Budker Institute of Nuclear Physics.

References

- [1] W. Sauerwein, A. Wittig, R. Moss and Y. Nakagawa eds., *Neutron Capture Therapy. Principles and Applications*, Springer (2012).
- [2] B. Bayanov et al., *Accelerator based neutron source for the neutron-capture and fast neutron therapy at hospital*, *Nucl. Instrum. Meth. A* **413** (1998) 397.
- [3] V. Aleinik, A. Ivanov, A. Kuznetsov, I. Sorokin and S. Taskaev, *Dark currents of a tandem accelerator with vacuum insulation*, *Instrum. Exp. Tech.* **56** (2013) 497.
- [4] A. Makarov et al., *Optimization of the negative hydrogen ion beam injection into the tandem accelerator with vacuum insulation*, in *Proceedings of RUPAC2012* (2012) 623, Saint-Petersburg, Russia.
- [5] A. Kuznetsov et al., *Calibration testing of the stripping target of the vacuum insulated tandem accelerator*, in *Proceedings of RUPAC2012* (2012) 560, Saint-Petersburg, Russia.
- [6] A. Kuznetsov, G. Malyshkin, A. Makarov, I. Sorokin, Yu. Sulyaev and S. Taskaev, *First experiments on neutron detection on the accelerator-based source for boron neutron capture therapy*, *Tech. Phys. Lett.* **35** (2009) 346.
- [7] D. Kasatov, A. Kuznetsov, A. Makarov, I. Shchudlo, I. Sorokin and S. Taskaev, *Proton beam of 2 MeV 1.6 mA on a tandem accelerator with vacuum insulation*, *2014 JINST* **9** P12016.
- [8] D. Kasatov, A. Makarov, S. Taskaev, I. Shchudlo, *Recording of current accompanying an ion beam in a tandem accelerator with vacuum insulation*, *Tech. Phys. Lett.* **41** (2015) 139.
- [9] I. Shchudlo, D. Kasatov, A. Makarov and S. Taskaev, *Measurement of the spatial distribution of gamma radiation at tandem accelerator with vacuum insulation*, in *Proceedings of RUPAC2014* (2014) 116, Obninsk, Russia.
- [10] R. Rakhimov and O. Khozinskii, *Electron emission at the bombardment of certain metals by ions of inert gases in the energy range up to 50 keV*, in *Proceedings of the Academy of Sciences of USSR, series: Physics* **26** (1962) 1398.
- [11] S. Taskaev, *Accelerator based epithermal neutron source*, *Phys. Part. Nuclei* **46** (2015) 956.
- [12] A. Kuznetsov et al. *The detection of nitrogen using nuclear resonance absorption of mono-energetic gamma rays*, *Nucl. Instrum. Meth. A* **606** (2009) 238.
- [13] A. Makarov and S. Taskaev, *Beam of monoenergetic neutrons for the calibration of a dark matter detector*, *JETP Lett.* **97** (2013) 667.