

Measurements of low-energy (d,n) reactions for BNCT

N. Colonna

Istituto Nazionale Fisica Nucleare, 70126 Bari, Italy

L. Beaulieu, L. Phair, G. J. Wozniak, and L. G. Moretto

Nuclear Science Division, Lawrence Berkeley National Laboratory, Berkeley, California 94720

W. T. Chu and B. A. Ludewigt

Life Sciences Division, Lawrence Berkeley National Laboratory, Berkeley, California 94720

(Received 9 September 1998; accepted for publication 3 March 1999)

Neutron yields and energy spectra have been measured for various deuteron-induced reactions at low energy. Neutrons of energy >100 keV emitted in the ${}^9\text{Be}(d,n){}^{10}\text{B}$, ${}^{12}\text{C}(d,n){}^{13}\text{N}$, and ${}^{13}\text{C}(d,n){}^{14}\text{N}$ reactions at $E_d=1.5$ MeV were detected at five angles by means of liquid scintillator detectors. While low-energy neutrons were observed in all studied reactions, only ${}^{13}\text{C}(d,n){}^{14}\text{N}$ is characterized by a relatively large yield with spectral features potentially interesting for an accelerator-based neutron source for BNCT. © 1999 American Association of Physicists in Medicine. [S0094-2405(99)02405-0]

Key words: boron neutron capture therapy (BNCT), accelerator-based neutron source, neutron-producing reactions

I. INTRODUCTION

A renewed interest in Boron Neutron Capture Therapy (BNCT)¹ has recently prompted searches for high quality, easily available, and cost-effective neutron sources. Although different materials and designs of moderator and filter assemblies have led to improvements in the quality of epithermal neutron beams produced at nuclear reactors, an accelerator-based neutron source may, in the near future, constitute a more attractive solution for the production of neutron beams with the intensity and spectral purity necessary for the treatment of cancer. In fact, with a suitable choice of the neutron-producing reaction, it may be possible to produce epithermal neutron beams with an energy distribution narrowly centered around the optimal value for the treatment of deep-seated tumors. In particular, relative to reactor-based sources, epithermal neutron beams produced with accelerators may be affected by a smaller contamination of high-energy neutrons ($E_n > \sim 25$ keV). Because of the large dose delivered to the skin and the brain surface by recoil protons, such neutrons pose constraints on the dose that can be delivered to the tumor and their presence in the therapeutic beam should therefore be minimized. Finally, fewer safety problems associated with radiation hazards may facilitate the installation of BNCT facilities in metropolitan areas, and the relatively low costs associated with the construction and maintenance of an accelerator-based source may allow for a wider diffusion of such therapy in many medical centers.

An accelerator-based neutron source relies upon a proton- or deuteron-induced reaction on a suitably chosen target. The choice of the primary beam energy and of the target is mainly dictated by the requirement of a high yield of low-energy neutrons, although economic considerations may also play a role in the choice of the most convenient reaction. The size and cost of the accelerator can be minimized by reduc-

ing the energy of the primary beam, while targets with good mechanical and thermal properties may result in less complicated and less costly cooling systems. Depending on the melting point of the target, a sophisticated cooling system may in fact be necessary to dissipate the large amount of power associated with the high beam currents required.

Currently, two reactions are being considered for use in the first generation of accelerator-based neutron sources for BNCT: the ${}^7\text{Li}(p,n){}^7\text{Be}$ reaction at an energy around 2.5 MeV,²⁻⁴ and the ${}^9\text{Be}(p,n){}^9\text{B}$ at energies approaching 4 MeV.⁵⁻⁷ Both reactions produce neutrons with adequate energy and yield, but their use is complicated by the low melting point of the Li target (180 °C) and production of the radioactive ${}^7\text{Be}$ residue ($T_{1/2}=53$ days) for the first reaction, and the higher proton energy and poorer neutron beam quality for the second one. In order to investigate whether alternative reactions exist for neutron production in BNCT, we have performed measurements of several (d,n) reactions. To restrict the investigation to low-energy deuteron beams, which could be produced with relatively small and inexpensive accelerators, we have concentrated on reactions characterized by a positive or slightly negative Q-value. Furthermore, Coulomb barrier considerations limit the target choice to light elements. Finally, the requirement of stable, mechanically, and thermally convenient materials restricts the number of potentially useful targets to essentially ${}^6\text{Li}$, ${}^9\text{Be}$, ${}^{10}\text{B}$, ${}^{12}\text{C}$, and ${}^{13}\text{C}$. Among the different reactions, the ${}^9\text{Be}(d,n){}^{10}\text{B}$ and the ${}^{12}\text{C}(d,n){}^{13}\text{N}$ have recently been investigated⁸ for their potential use in BNCT, although the energy and angular distributions of the emitted neutrons are not well determined. On the other hand, the ${}^{13}\text{C}(d,n){}^{14}\text{N}$ reaction has not yet been considered as a low-energy neutron source for BNCT, although Brune *et al.*⁹ reported on the large cross-section (XS) that characterizes this reaction,

which could make it interesting for several applications that require intense neutron sources.

In this paper we present measurements of energy and angular distributions for some potentially interesting (d,n) reactions. Differential and total yields have been measured for thin and thick targets, with the aim of providing a basis for further evaluation of epithermal neutron production from an accelerator-based source for use in Neutron Capture Therapy. The present discussion focuses on ^{10}B as the capture agent for the low-energy neutrons. However, there also exist other isotopes, such as $^{155,157}\text{Gd}$, ^6Li , and ^{235}U , which are currently being considered as potential NCT agents because of their large thermal neutron capture cross-sections. Therefore, the low-energy neutron sources discussed in this paper may be useful beyond BNCT for which the original measurements were made.

II. EXPERIMENTAL METHOD

The measurements were performed at the 88-in. Cyclotron of the Lawrence Berkeley National Laboratory. Deuteron beams of 1.5 MeV, and proton beams of 2.5 MeV were obtained by accelerating D_3^+ and H_3^+ molecular beams from the Electron Cyclotron Resonance source. To minimize in-scattering, the targets were positioned inside a thin-walled scattering chamber, 30 cm in diameter, mounted at the end of a long beam-line far from magnets or other heavy material. A plungable Faraday Cup was mounted inside the chamber to measure the integrated beam current. For thick target measurements, the total charge of the beam stopped in the target was measured. However, since no electron suppression was implemented, the measured charge in the thick target measurements was only used for relative normalization purposes. To estimate the uncertainty in the absolute yield measurements, the $^7\text{Li}(p,n)^7\text{Be}$ reaction at 2.5 MeV of incident energy was also measured with the present setup. The overall uncertainty, associated with the integrated beam charge as well as with the efficiency, was estimated from the $\text{Li}(p,n)$ reaction to be of the order of 30% (1σ).

Neutrons were detected by means of five BC501A liquid scintillator cells made by BICRON Corporation (Ohio, USA), 12.7 cm in diameter and 5 cm thick, coupled to XP2410 Phillips phototubes. The detectors were mounted at polar angles of 0, 30, 60, 90, and 140 degrees, on alternate sides of the beam axis, at a distance of 50 cm from the target. The neutron energy was determined from the time-of-flight (TOF) relative to the Cyclotron radiofrequency (rf) signal. For an rf period of ~ 100 ns, the choice of a 50 cm distance allowed the measurement of neutrons with energy as low as 100 keV, although it also resulted in a poor energy resolution for high-energy neutrons. For an overall time resolution of ~ 4 ns, as measured from the prompt gamma-rays peak (see Fig. 1 for example), the energy resolution ranged from 6 keV to 1 MeV for 0.1 to 5 MeV neutrons, respectively.

To suppress environmental gamma-ray background, the scintillator cells were surrounded by a 3-mm-thick lead sheet. Background from scattered neutrons was minimized by positioning the detectors at a minimum distance of 1.5 m

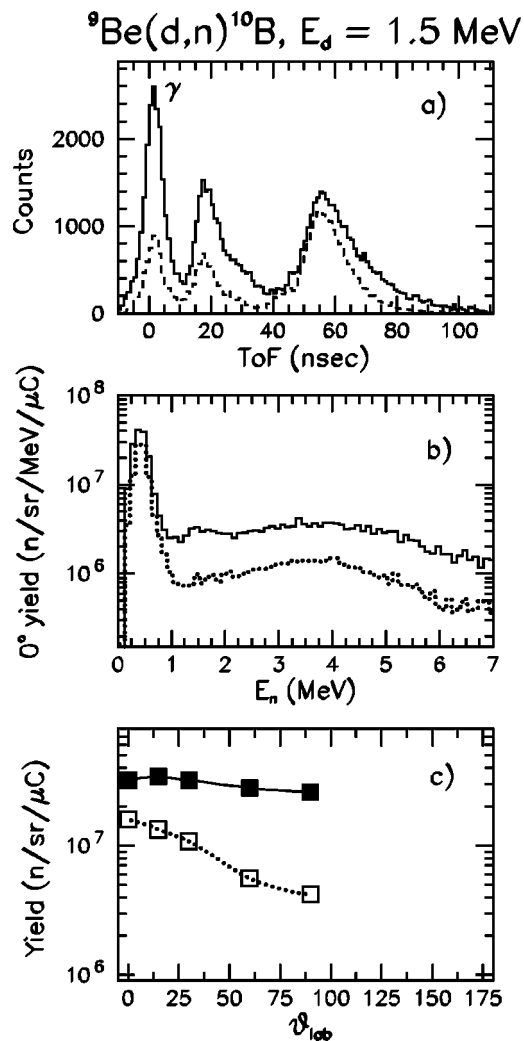


FIG. 1. (a) Background-subtracted time-of-flight distribution measured at 0° for the $^9\text{Be}(d,n)^{10}\text{B}$ reaction at $E_d=1.5$ MeV. The solid and dashed histogram refer, respectively, to thick and thin target measurements. (b) Efficiency corrected neutron energy distribution for the thick (solid histogram) and thin (dotted histogram) target measurement at 0° . The broad distribution above 1 MeV is the result of the convolution of different high-energy peaks. (c) Measured angular distribution for the $d+^9\text{Be}$ reaction. The solid symbols depicts the total yield as a function of angle, while the open symbols represents the yield of the low-energy ($E_n < 1$ MeV) component only. The solid and dotted curves are meant to guide the eye.

from the walls or other scattering material (the beam height relative to the floor is 120 cm). Furthermore, the small distance from the target helped to minimize the contamination of scattered neutrons, because of solid angle as well as TOF considerations. Together with the TOF, the light output and a standard pulse shape discrimination time for each event were recorded. More details on the detectors and their efficiency are available.¹⁰ An estimated threshold of ~ 10 keV electron-equivalent was maintained during the measurements, so as to detect neutrons of energy as low as 100 keV (because of saturation effects, protons of 100-keV energy produce in liquid scintillator detectors the same light as 10-keV electrons). Such a low threshold on the neutron energy is fundamental when studying neutron production for BNCT, since a signifi-

cant contribution to the epithermal neutron beam can originate from low-energy neutrons.

III. RESULTS

A. ${}^9\text{Be}(d,n){}^{10}\text{B}$ reaction

Guzek *et al.*¹¹ have recently investigated the ${}^9\text{Be}(d,n){}^{10}\text{B}$ reaction at a deuteron energy slightly above 1 MeV as a possible intense neutron source. In particular, although the Q-value of this reaction is quite large, $Q=4.36$ MeV, the authors reported the presence of a strong neutron peak at an energy well below 1 MeV. The absolute yield of low-energy neutrons, and the amount of contamination of high-energy neutrons in the spectrum are, however, still somewhat unclear.

Figure 1(a) shows the background-subtracted TOF spectrum measured at 0° for the ${}^9\text{Be}(d,n){}^{10}\text{B}$ reaction at $E_d = 1.5$ MeV. The solid and dashed histogram represent the results for the thin (0.8 mg/cm²) and thick (20 mg/cm²) targets, respectively, the thin target corresponds to an energy loss of the ${}^2\text{H}$ beam of ~ 200 keV. Together with the gamma peak, two neutron structures are observed in the spectrum. The intense peak at large TOF corresponds on average to 400-keV neutrons, as evident from the efficiency-corrected energy distribution of Fig. 1(b). The very low energy and apparently high yield that characterizes this peak, as well as the low energy of the primary beam and the good mechanical and thermal properties of the Be target, have led Guzek *et al.* to suggest this reaction as a potential neutron source for BNCT.¹¹ However, together with the 400-keV peak, a high-energy peak is evident in the TOF spectrum. The energy of this peak is estimated to be centered around 3.6 MeV, which corresponds to the excitation of the 2.15 MeV level in the ${}^{10}\text{B}$ residue. Although this peak has not been reported,¹¹ previous works have shown the existence of a significant high-energy contamination, which may complicate the task of finding the proper moderator design to produce with this reaction epithermal neutron beams with intensity and spectral characteristics adequate for BNCT.^{12,13}

As is clear from the present measurements, the amount of contamination depends on the target thickness. In particular, after correcting for the efficiency, the high-energy neutrons have been estimated to constitute about 38% of the total yield for the thin target case. For the thick target, the contamination increases to approximately 50%, as expected from energy considerations (the excitation of the 5.1-MeV level in the ${}^{10}\text{B}$ residue becomes energetically impossible for deuteron energies below ~ 1 MeV). Although a bombarding energy dependence of the high-energy neutron yield cannot be excluded, it does not seem likely that it will decrease to a value sufficiently low to allow for the use of this reaction in BNCT. Furthermore, both the 0° and the total yield, as evident from the angular distribution of Fig. 1(c), do not justify a particular interest in this reaction as a potential neutron source for accelerator-based BNCT. For higher deuteron energies, the rapid increase of the XS is offset by a corresponding increase of the average neutron energy, which leads to a further worsening of beam quality after moderation, thus

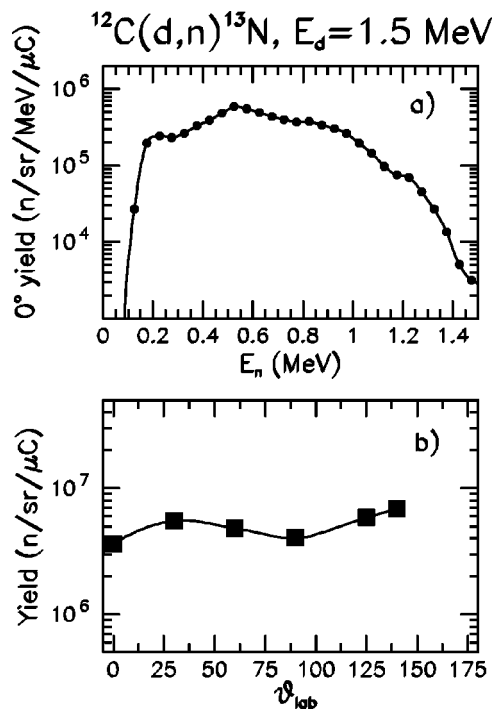


FIG. 2. (a) Efficiency corrected neutron energy distribution for the ${}^{12}\text{C}(d,n){}^{13}\text{N}$ reaction, measured at 0° . The data refer to thick target measurements only. (b) Measured angular distribution for the same reaction.

making this reaction interesting only for applications that do not require high-quality epithermal neutron beams.

B. ${}^{12}\text{C}(d,n){}^{13}\text{N}$

The slightly negative Q-value that characterizes this reaction ($Q=-0.28$ MeV), combined with the good mechanical properties of carbon and, especially, with its extremely high melting point, make this reaction worth investigating for use as a low-energy neutron source. A deuteron energy of 1.5 MeV may represent a reasonable compromise between the need of minimizing the neutron energy, and that of maximizing the XS which is strongly influenced, at low incident energy, by the Coulomb barrier. Figure 2(a) shows the energy distribution measured for this reaction at 0° . A clean, low-energy neutron emission is observed, peaked at 500 keV, as expected from energy considerations. The angular distribution, shown in Fig. 2(b), is characterized by a minimum at 0° , and by an increase for angles greater than 90° , a behavior consistent with previously reported measurements at slightly lower incident energy.^{14,15} Although it may be possible to setup a neutron beam line at angles different from the primary beam direction (which might lead to other advantages, such as multiple treatment rooms, or a symmetric dose monitoring room), the yield at all angles for this reaction seems too small for any practical application in BNCT. Preliminary estimates indicate that an epithermal neutron beam of the necessary intensity could only be obtained at this beam energy with a deuteron beam current of several hundred mA. A higher deuteron beam energy may result in a significantly higher neutron yield, even though such an increase does not

necessarily result in a higher epithermal neutron flux, since increasing the energy of the primary beam would also lead to an increase of the neutron energy. We have not investigated further this possibility, but it seems unlikely that this reaction will constitute a viable alternative to the higher-energy proton reactions, and in particular to the 2.5 MeV $\text{Li}(p,n)$ reaction.⁸

C. $^{13}\text{C}(d,n)^{14}\text{N}$

Among the deuteron-induced reactions at low incident energy, the $^{13}\text{C}(d,n)^{14}\text{N}$ is certainly one of the most interesting because of the previously mentioned advantages of carbon as target material, the stable reaction residue and, especially, the large XS that characterizes it. As reported in a study,⁹ a XS of 0.3 barns, slightly smaller than the one for the 2.3-MeV $\text{Li}(p,n)$ reaction, is observed even for deuteron energies as low as 1 MeV. However, neither the energy nor the angular distribution of the neutrons have been reported for this reaction. Because of the large, positive Q -value ($Q=5.33$ MeV), the neutron energy cannot be easily estimated, since the ^{14}N residue can be left in several excitation energy levels.¹⁶ In order to check the applicability of this reaction to accelerator-based BNCT, we have measured the neutron energy distribution and yield at various angles for this reaction. The TOF spectrum measured at 0° for a thick target, at a deuteron energy of 1.5 MeV, is shown in Fig. 3(a). An abundant low-energy neutron production is observed. The main contribution can most probably be associated with the 5.83-MeV level in the ^{14}N residue. Higher-energy peaks are also observed in the figure, which can be associated with the 5.32- and 2.31-MeV levels. Figure 3(b) shows the efficiency-corrected energy spectrum at 0° .

For this reaction, a large fraction of the neutrons are emitted with an energy below 1 MeV. The overall fraction of neutrons with $E_n > 1$ MeV is estimated to be $30\% \pm 10\%$. However, most of those neutrons are concentrated in a peak of energy slightly larger than 1 MeV, with only 6% of the neutrons emitted with energy greater than 2 MeV (the energy resolution prevents for an accurate determination of the high-energy neutron peaks). Figure 3(c) shows the angular distribution for the $^{13}\text{C}(d,n)^{14}\text{N}$ reaction at $E_d=1.5$ MeV. The solid symbols represent the total yield, while the open symbols refer only to the low-energy component ($E_n < 1$ MeV). The yield of low-energy neutrons decreases as the angle increases, while a sizable yield of the high-energy component survives at all angles. As a consequence, a large fraction of neutrons emitted at angles greater than 60° (laboratory reference frame) have energy in excess of 2 MeV. A complete simulation of the reflection and moderation process has to be performed in order to study the effect of these neutrons on the final dose distribution. In fact, the presence of higher-energy neutrons at large angles does not necessarily lead to a worsening of the epithermal beam quality, and may result in more therapeutic neutrons being produced with useful energy for a proper choice of the reflector and moderator assembly.

By interpolating and integrating the angular distribution of Fig. 3(c), we estimate the total neutron yield for the

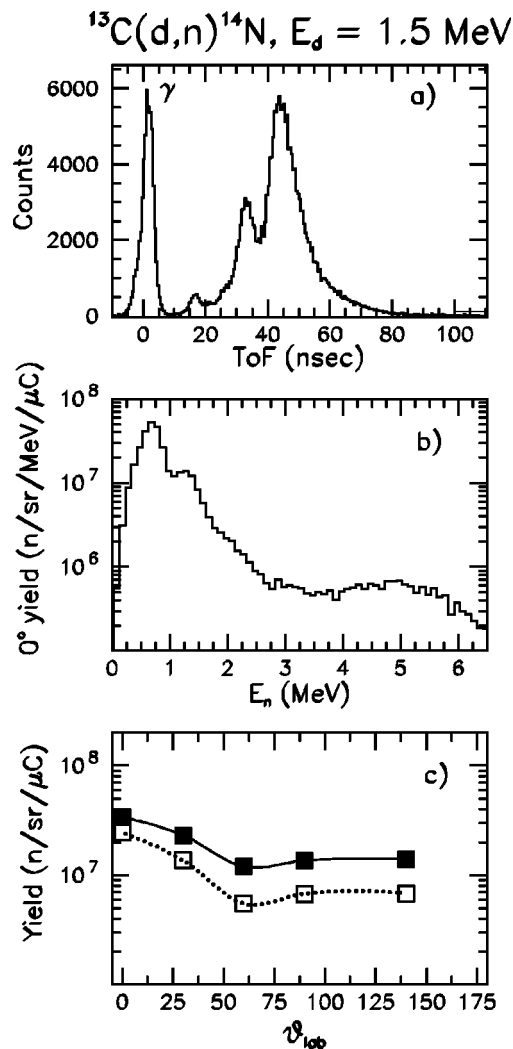


Fig. 3. (a) Background-subtracted time-of-flight distribution measured at 0° for the $^{13}\text{C}(d,n)^{14}\text{N}$ reaction at $E_d=1.5$ MeV on a thick target. (b) Efficiency-corrected neutron energy distribution for the thick target measurement at 0° . (c) Measured angular distribution for the $d+^{13}\text{C}$ reaction. The solid and open symbols refer, respectively, to the total yield and that for neutrons with $E_n < 1$ MeV.

$^{13}\text{C}(d,n)^{14}\text{N}$ reaction at $E_d=1.5$ MeV to be $\sim 1.9 \times 10^8$ neutrons/ μC . This value is $\sim 30\%$ lower than the total yield estimated from the XS,⁹ which is $\sim 2.4 \times 10^8$ neutrons/ μC . Although the discrepancy is comparable to the uncertainty in our absolute normalization procedure, the presence of a very low-energy emission ($E_n < 0.1$ MeV), to which the present setup was insensitive, cannot be excluded. While further measurements are needed in order to estimate the neutron yield with higher accuracy, the present results suggest that the $^{13}\text{C}(d,n)^{14}\text{N}$ reaction could be potentially interesting as a low-energy neutron source. The optimal neutron energy has not been investigated, and it cannot be excluded that higher incident energy may be more appropriate in terms of neutron yield or energy spectra. Preliminary calculations of the moderator process indicate that for deuteron energy of 1.5 MeV, a beam current of less than 100 mA is required to keep the treatment time below 1 h, with a beam quality superior to

TABLE I. Summary of the angle-integrated yield, average energy, and level of high-energy contamination, measured for different deuteron-induced reactions at 1.5 MeV. The total yields have been estimated by interpolating and integrating the angular distributions shown in Fig. 4. For comparison, the yields for the ${}^7\text{Li}(p,n){}^7\text{Be}$ and ${}^9\text{Be}(p,n){}^9\text{B}$ reactions at 2.5 MeV are also reported in the table.

Reaction	E_{in} (MeV)	Tot. yield (n/ μC)	$\langle E_n \rangle$ at 0° (MeV)	Frac. of neut. at 0° with $E_n > 1$ MeV
${}^7\text{Li}(p,n){}^7\text{Be}$	2.5	9.8×10^8	0.6	0
${}^9\text{Be}(p,n){}^9\text{B}$	2.5	3.9×10^7	0.4	0
${}^9\text{Be}(d,n){}^{10}\text{B}$	1.5	3.3×10^8	1.66	50%
${}^{12}\text{C}(d,n){}^{13}\text{N}$	1.5	6.0×10^7	0.55	0
${}^{13}\text{C}(d,n){}^{14}\text{N}$	1.5	1.9×10^8	1.08	30%

currently available reactor beams [although inferior to neutron beams that can be produced with the ${}^7\text{Li}(p,n){}^7\text{Be}$ reaction].¹⁷ Such high intensity beams may be within reach of the accelerator technology currently being developed,^{18–20} with the clear advantage of a low primary beam energy and convenient target material. More accurate experimental data are needed in order to access the applicability of this reaction to the production of clinically useful epithermal neutron beams for NCT. Further studies are also necessary to investigate whether, as a consequence of the large excitation energy of the residue, the ${}^{13}\text{C}(d,n){}^{14}\text{N}$ reaction is affected by a significant contamination of γ -rays with energy of a few MeV, which may contribute to an increase of the background dose.

IV. SUMMARY AND CONCLUSIONS

The results of the present measurement are summarized in Table I. The total yield and the contamination from high-energy neutrons ($E_n > 1$ MeV) for the measured (d,n) reactions are reported in the table and compared with the prediction for the ${}^7\text{Li}(p,n){}^7\text{Be}$ reaction and with experimental data on the ${}^9\text{Be}(p,n){}^9\text{B}$ reaction at 2.5 MeV. A comparison between the neutron angular distribution for the different reactions is shown in Fig. 4.

Among the different reactions, only the ${}^{12}\text{C}(d,n){}^{13}\text{N}$ and the ${}^9\text{Be}(p,n){}^9\text{B}$ reactions at $E_p < 3$ MeV present a spectral purity of low-energy neutrons comparable to the ${}^7\text{Li}(p,n){}^7\text{Be}$ reaction, but their yield seems too low for currently available accelerator technology. On the other hand, both the ${}^9\text{Be}(d,n){}^{10}\text{B}$ and the ${}^{13}\text{C}(d,n){}^{14}\text{N}$ reactions present reasonably high yields, but are affected by a sizable contamination of high-energy neutrons. However, while neutrons of several MeV energy are emitted in the ${}^9\text{Be}(d,n){}^{10}\text{B}$ reaction, most of the contamination for the ${}^{13}\text{C}$ targets is concentrated at neutron energies slightly above 1 MeV, so that the quality of the epithermal neutron beam may not be significantly worsened by the presence of this higher-energy peak.

In conclusion, the low-energy (d,n) reaction investigated here produce neutrons with lower yield and, in most cases, higher average energy than the 2.5-MeV ${}^7\text{Li}(p,n){}^7\text{Be}$. However, our results suggest that, with a proper choice of the deuteron energy and moderator design, a more cost-effective accelerator facility might result from the use of the

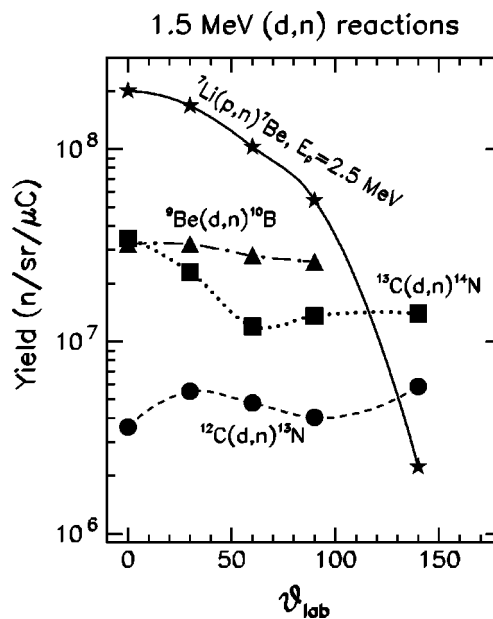


Fig. 4. A summary of the yield as a function of laboratory angle for some studied reactions (the curves are only meant to guide the eye). All results are relative to thick target measurements. For comparison, the predictions of the ${}^7\text{Li}(p,n){}^7\text{Be}$ reaction are also shown in the figure. The statistical errors are within the size of the symbols, while the uncertainty on the absolute yield determination, mainly associated with the normalization procedure and detector efficiency, has been estimated to be 30% (1σ). In all measurement, the minimum neutron energy measured was 100 keV.

${}^{13}\text{C}(d,n){}^{14}\text{N}$ reaction which represents, in our opinion, the only potentially interesting alternative for neutron production for BNCT among the different (d,n) reactions studied so far. More accurate measurements and detailed simulations of the moderation process are, however, necessary to estimate the intensity of the deuteron beams needed to produce the flux of epithermal neutrons necessary for the therapy.

Because of the limited resolution for high-energy neutrons, and the uncertainty on the absolute yield, the present results are by no means conclusive, and are meant to stimulate further discussion and measurements necessary to identify, if any, proton- or deuteron-induced reactions that would lead to simple and inexpensive accelerator-based neutron sources while satisfying all of the dose requirements for BNCT.

ACKNOWLEDGMENTS

The authors wish to thank the 88-in. accelerator crew for their endless effort in the difficult task of providing quality beams of unusually low energy. In particular, thanks are due to Dan Xie for setting up the AECR injector of the D_3^+ and H_3^+ molecular beam, to Aran Guy for tuning the cyclotron, and to Dave Clark for the excellent job in minimizing the time resolution of the beam. This work was supported by the Director, Office of Energy Research, Office of High Energy and Nuclear Physics, Nuclear Physics Division of the US Department of Energy, under Contract No. DE-AC03-76SF00098, and by "Istituto Nazionale Fisica Nucleare,"

Italy. One of us (L.B.) acknowledges a fellowship from the National Sciences and Engineering Research Council (NSERC), Canada.

- ¹For a recent review see: R. F. Barth, A. H. Soloway, and R. M. Brugger, "Boron neutron capture therapy of brain tumors—Past history, current status and future potentials," *Cancer Investigations* **14**, 534–550 (1996).
- ²J. C. Yanch, X. L. Zhou, R. E. Shefer, and R. E. Klinkowstein, "Accelerator-based neutron beam design for neutron capture therapy," *Med. Phys.* **19**, 709–721 (1992).
- ³W. T. Chu, D. L. Bleuel, R. J. Donahue, R. A. Gough, J. Kwan, K.-N. Leung, B. A. Ludewigt, C. Peters, T. L. Phillips, L. L. Reginato, J. W. Staples, R. P. Wells, and S. S. Yu, "Design of a new BNCT facility based on an ESQ accelerator," in *Advances in Neutron Capture Therapy*, edited by B. Larson, J. Crawford, and R. Weinreich (Elsevier Science B.V., The Netherlands, 1997), Vol. 1, pp. 533–537.
- ⁴D. Bleuel, R. J. Donahue, B. A. Ludewigt, and J. Vujic, "Designing accelerator-based epithermal neutron beams for boron neutron capture therapy," *Med. Phys.* **25**, 1725–1734 (1998).
- ⁵W. B. Howard, J. C. Yanch, S. M. Grimes, T. N. Massey, S. I. Al-Quarishi, D. K. Jacobs, and C. E. Brient, "Measurement of the ${}^9\text{Be}(p,n)$ thick target spectrum for use in accelerator-based boron neutron capture therapy," *Med. Phys.* **23**, 1233–1235 (1996).
- ⁶C. K. Wang and Brian R. Moore, "Thick beryllium target as an epithermal neutron source for neutron capture therapy," *Med. Phys.* **21**, 1633–1638 (1994).
- ⁷G. Yue, J. Chen, and R. Song, "Study of boron neutron capture therapy using neutron source with protons bombarding a thick ${}^9\text{Be}$ target," *Med. Phys.* **24**, 851–855 (1997).
- ⁸G. E. McMichael, T. J. Yule, and X.-L. Zhou, "The Argonne ACWL, a potential accelerator-based neutron source for BNCT," *Nucl. Instrum. Methods Phys. Res. B* **99**, 847–850 (1995).
- ⁹C. R. Brune and R. W. Kavanagh, "Total cross sections and thermonuclear reaction rates for ${}^{13}\text{C}(d,n)$ and ${}^{14}\text{C}(d,n)$," *Phys. Rev. C* **45**, 1382–1388 (1992).
- ¹⁰N. Colonna and G. Tagliente, "Response of liquid scintillator detectors to neutrons of $E_n < 1$ MeV," *Nucl. Instrum. Methods Phys. Res. A* **416**, 109–114 (1998).
- ¹¹J. Guzek, U. A. S. Tapper, W. R. McMurray, and J. I. W. Watterson, "Characterization of the ${}^9\text{Be}(d,n){}^{10}\text{B}$ reaction as a source of neutrons employing commercially available radio frequency quadrupole (RFQ) linacs," *5th Intern. Conf. on Applications of Nuclear Techniques*, Crete, 1996; *Proc. SPIE* **2867**, 509–512 (1997).
- ¹²S. Whittlestone, "Neutron distributions from the deuteron bombardment of a thick beryllium target," *J. Phys. D* **10**, 1715–1723 (1977).
- ¹³J. W. Meadows, "The ${}^9\text{Be}(d,n)$ thick-target neutron spectra for deuteron energies between 2.6 and 7.0 MeV," *Nucl. Instrum. Methods Phys. Res. A* **324**, 239–246 (1993).
- ¹⁴A. Elwyn, J. V. Kane, S. Ofer, and D. H. Wilkinson, "Reaction $\text{C}^{12}(d,n)\text{N}^{13}$," *Phys. Rev.* **116**, 1490–1498 (1959).
- ¹⁵A. N. James, "The $\text{C}^{12}(d,n)\text{N}^{13}$ reaction up to 1.35 MeV," *Nucl. Phys.* **23**, 648–656 (1961).
- ¹⁶A. N. James, "The $\text{C}^{13}(d,n)\text{N}^{14}$ reaction," *Nucl. Phys.* **24**, 132–137 (1961).
- ¹⁷The simulations were performed with a beam shaping assembly made of a 25-cm-thick ${}^7\text{LiF}$ moderator and an Al_2O_3 reflector, with a geometry similar to the one presented in Ref. 4.
- ¹⁸L. L. Reginato, J. Ayers, R. Johnson, C. Peters, and R. Stevenson, "Designing power supplies for 2.5 MV, 100 mADC for boron neutron capture therapy," *14th Intern. Conf. on Application of Accelerators in Research and Industry*, Denton, TX, 1996, AIP Conference Proceedings **392**, 1305–1308 (1997).
- ¹⁹J. W. Kwan, E. Henestroza, C. Peters, L. L. Reginato, and S. S. Yu, "Designs of a DC ESQ accelerator for BNCT application," *14th Intern. Conf. on Application of Accelerators in Research and Industry*, Denton, 1996, AIP Conf. Proc. **392**, 1313–1315 (1997).
- ²⁰J. W. Kwan, O. A. Anderson, L. L. Reginato, M. C. Vella, and S. S. Yu, "A 2.5 MeV electrostatic quadrupole dc accelerator for BNCT application," *Nucl. Instrum. Methods Phys. Res. B* **99**, 710–712 (1995).